


Oppboga™ Robust

Solid unbleached sulphate board, white coated on both sides / natural brown uncoated on one or both sides

SUB-STANCE	THICKNESS		BENDING RESISTANCE L&W 15° mN		BENDING MOMENT Taber 15° mNm	
	g/m ²	µm pt	MD	CD	MD	CD
500	720 28	1500	825	71	40	
540	790 31	1950	1100	94	53	
580	850 34	2150	1250	104	60	
610	900 36	2500	1425	121	69	
640	950 37	1400 ¹	750 ¹	*	*	
670	1010 40	1475 ¹	825 ¹	*	*	

¹L&W 5° mN

*values cannot be measured

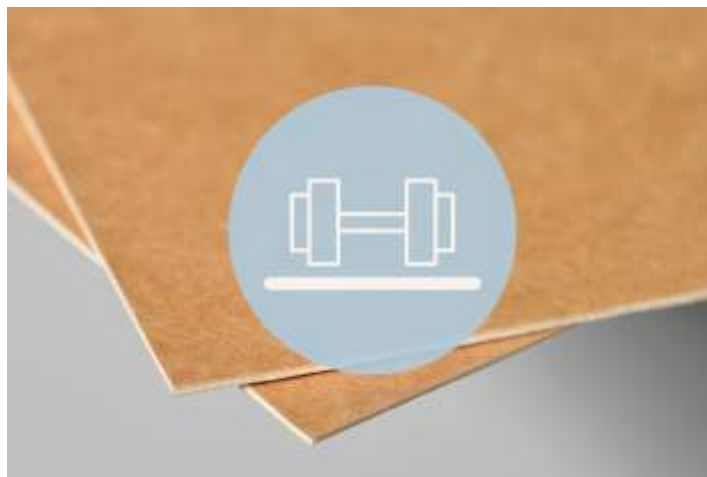

Strong. Tear resistant. An ideal alternative to micro-fluting.

APPLICATIONS

Luxury beverage cartons • packaging for gift sets, electronics or medical equipment • gift and loyalty cards

PRINTING

Offset printing • screen printing • large format digital printing

CONVERSION

Embossing • foil and film lamination • varnishing • die cutting • creasing • perforating • cutting and scoring

ADDITIONAL INFORMATION

www.oppboga.com

Tolerances / Testing Standards

Grammage (DIN ISO 536)±5%
 Thickness (DIN ISO 534)±5%
 Bending stiffness (ISO 5629)-20%
 CIE Whiteness TSmin. 89%
 Surface smoothness (ISO 8791-4)max. 2.8µm

Printing Surface Properties

CIE Whiteness93%
 Surface smoothness (PPS) 1.7µm