


Oppboga Textured Extra White™

Pure cellulose white board, uncoated on both sides

SUB-STANCE	THICKNESS		BENDING RESISTANCE L&W 15° mN		BENDING MOMENT Taber 15° mNm	
	g/m ²	μm pt	MD	CD	MD	CD
550	700	27.6	1500	700	73	34
650	800	31.5	2000	1050	97	51

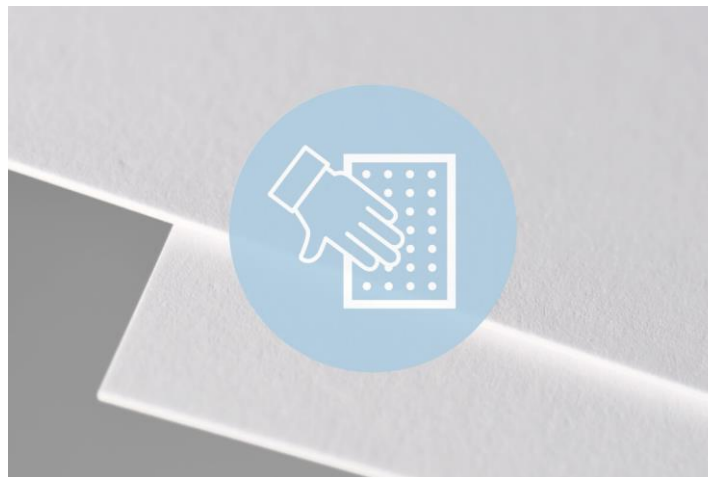

Fresh. Tactile. Ageless.

APPLICATIONS

Premium packaging • luxury beverage cartons

PRINTING

Offset printing

CONVERSION

Embossing • foil and film lamination • varnishing • die cutting • creasing • perforating • cutting and scoring

ADDITIONAL INFORMATION

www.oppboga.com

Tolerances / Testing Standards

Grammage (DIN ISO 536)	±10%
Thickness (DIN ISO 534)	±10%
Bending stiffness (ISO 5629)	-20%
Cobb 60 (ISO 535)	max. 35 g/m ²

Printing Surface Properties

CIE Whiteness D65/10° (ISO 11475).....	148
Roughness Bendtsen (ISO 8791-2)).....	300 ml/min
Cobb 60 (ISO 535).....	25 g/m ²